
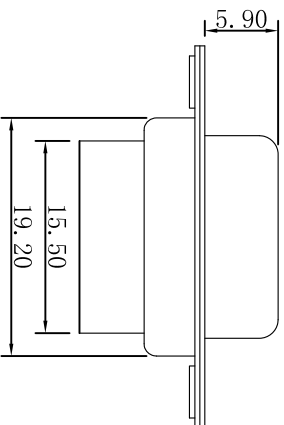



# GP Component

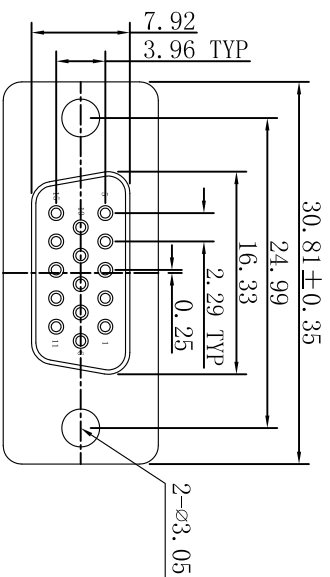

## Specification Type

A	B	C

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
AO			原始版本(INITIAL EDITION)	2021.01.05	m t

### CHARACTERISTICS:

1. RATED VOLTAGE: 250V
2. RATED CURRENT: 3.0AMP
3. CONTACT RESISTANCE: 30mΩ Max.
4. INSULATION RESISTANCE: 1000 MΩ MIN. 500V DC
5. Electric Pressure: Keeping 60 second in AC 500V/1mA
6. Operating temperature: -55℃~105℃
7. INSERTION/EXTRACTION FORCE PER CONTACT: 3.74Kg Max 0.33Kg Min.

01.HDEC15 F X XXX XX A XXX

PIN Poles	15:15PIN	M/F Differentiates	M=Male F=Female	Hsg Color	1=Black 3=Blue 2=White 4=Green	Plating	G00:Gold flash	G01:Gold 1U"	G03:Gold 3U"	Gxx:Gold XXU"
Water Code		Specification Type		Hsg Material			B00:Bright sn	B01:Bright sn 1U"	B03:Bright sn 3U"	Bxx:Bright sn XXU"
				H4=PA66 HF	H5=LCF		M00:Matte sn	M01:Matte sn 1U"	M03:Matte sn 3U"	Mxx:Matte sn XXU"
				10=PB1	11=PA6T					
				13=PA66	14=PA46					

 UNITS: mm [inch]	 东莞市跃展精密连接器有限公司 Dongguan YueZhan Precision Connectors Co., Ltd	DESIGN: 牟 2021.01.05	PART NAME: HDCC 15F系列图
		CHECKED: 牟 2021.01.05	PART NO. 01.HDEC15FXXXXXXXXXX
TOLERANCE: X.X ±0.35 X.XX ±0.25 X.XXX ±0.15 Angle ±3.0°	APPROVED: 牟 2021.01.05	SHEET NO. 01 OF 01	
SCALE:1:1 SIZE:A4			