
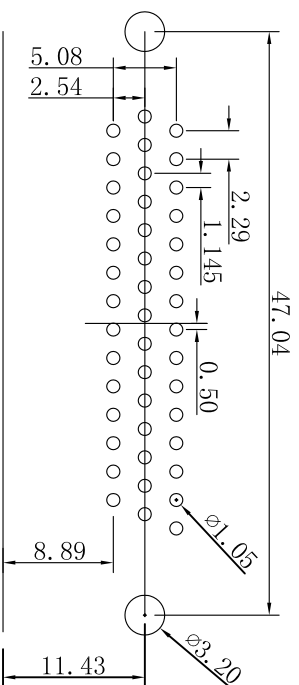
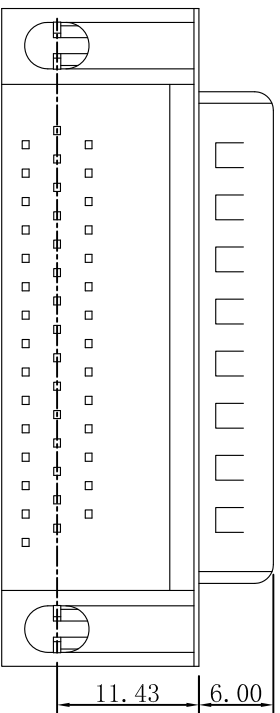
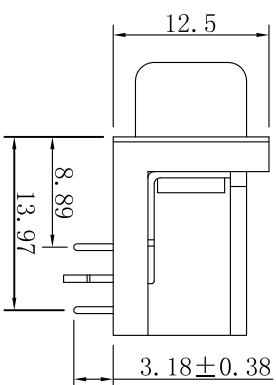



GP Component

53.04 ± 0.35

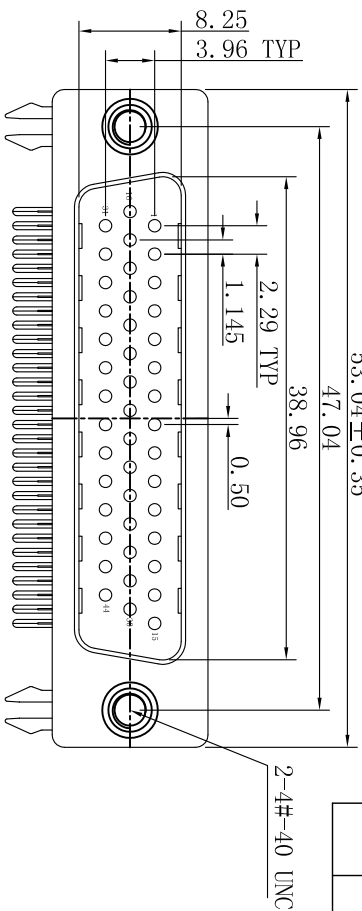

PCB layout

Specification Type (1:2)

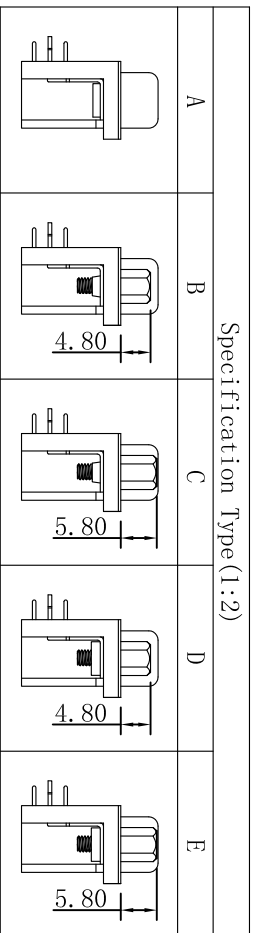

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			原始版本(INITIAL EDITION)	2021.01.05	m t

CHARACTERISTICS:

1. RATED VOLTAGE: 250V
2. RATED CURRENT: 3.0AMP
3. CONTACT RESISTANCE: 30mΩ Max.
4. INSULATION RESISTANCE: 1000 MΩ MIN. 500V DC
5. Electric Pressure: Keeping 60 second in AC 500V/1mA
6. Operating temperature: -55°C ~ 105°C
7. INSERTION/EXTRACTION FORCE PER CONTACT: 9.08Kg Max 0.78Kg Min.

01.HDR844 M X XXX XX A XXX

PIN Poles	44:44PIN	Water Code	
M/F Differentiates	M=Male F=Female	Specification Type	
Hsg Color	1=Black 3=Blue 2=White 4=Green 5=Yellow 6=Purple	Hsg Material	
Plating	G00:Gold flash	M00:Matte sn	
	G01:Gold 1U"	B01:Braight sn 1U"	M01:Matte sn 1U"
	G03:Gold 3U"	B03:Braight sn 3U"	M03:Matte sn 3U"
	Gxx:Gold XXU"	Bxx:Braight sn XXU"	Mxx:Matte sn XXU"

<p>东莞市跃展精密连接器有限公司 Dongguan YueZhan Precision Connectors Co., Ltd</p>	DESIGN: 牟 2021.01.05	PART NAME: HDR 44M系列图
	CHECKED: 牟 2021.01.05	
APPROVED: 牟 2021.01.05	DRAW NO.	SHEET NO. 01 OF 01

SCALE:1:1 SIZE:A4