
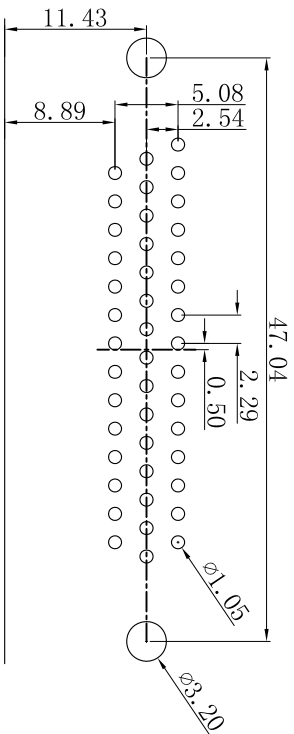
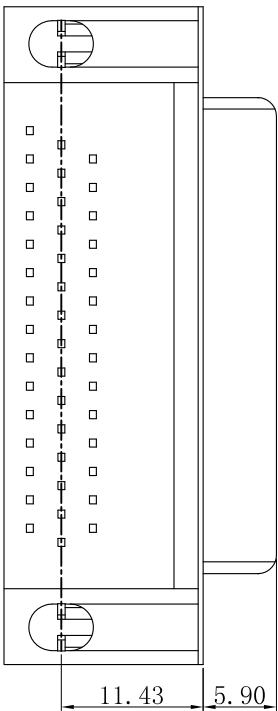



# GP Component

53.04 ± 0.35

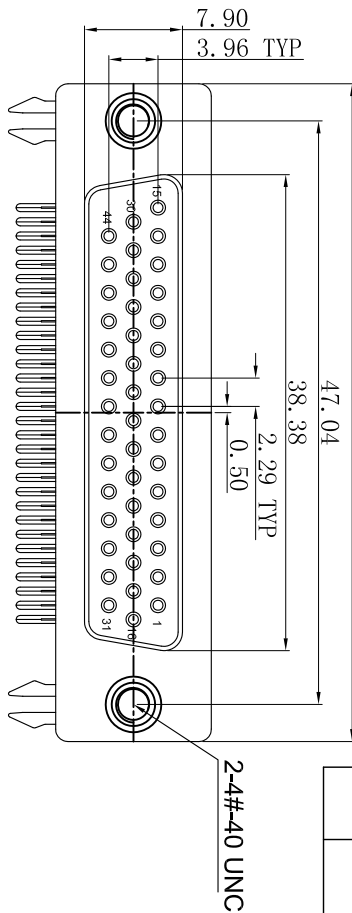


PCB layout

Specification Type (1:2)

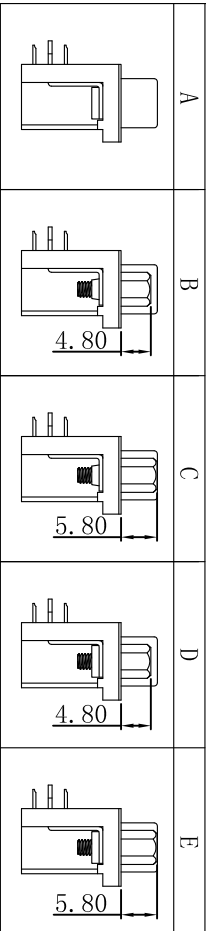

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			原始版本(INITIAL EDITION)	2021.01.05	m t

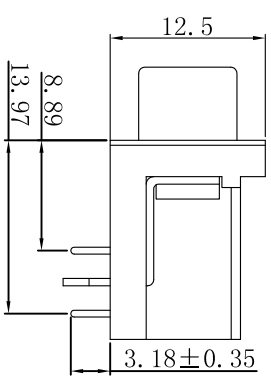

### CHARACTERISTICS:

1. RATED VOLTAGE: 250V
2. RATED CURRENT: 3.0AMP
3. CONTACT RESISTANCE: 30mΩ Max.
4. INSULATION RESISTANCE: 1000 MΩ MIN. 500V DC
5. Electric Pressure: Keeping 60 second in AC 500V/1mA
6. Operating temperature: -55°C~105°C
7. INSERTION/EXTRACTION FORCE PER CONTACT: 9.08Kg Max 0.78Kg Min.

01.HDR844 F X XXX XX A XXX

PIN Poles	44:44PIN	Water Code	
M/F Differentiates	M=Male F=Female	Specification Type	
Hsg Color	1=Black 3=Blue 5=Yellow 2=White 4=Green 6=Purple	Hsg Material	
Plating	G00:Gold flash G01:Gold 1U" G03:Gold 3U" Gxx:Gold XXU"	H4=PA66 HF H5=LCF H10=PBTF H14=PA66	H2=PA6T HF H3=PA9T HF H11=PA6T H12=PA9T
	B00:Bright sn B01:Bright sn 1U" B03:Bright sn 3U" Bxx:Bright sn XXU"	M00:Matte sn M01:Matte sn 1U" M03:Matte sn 3U" Mxx:Matte sn XXU"	

<p>东莞市跃展精密连接器有限公司 Dongguan YueZhan Precision Connectors Co., Ltd</p>	DESIGN: 牟 2021.01.05	PART NAME: HDR 44F系列图
	CHECKED: 牟 2021.01.05	
APPROVED: 牟 2021.01.05	DRAW NO.	SHEET NO. 01 OF 01
SCALE:1:1 SIZE:A4		

